


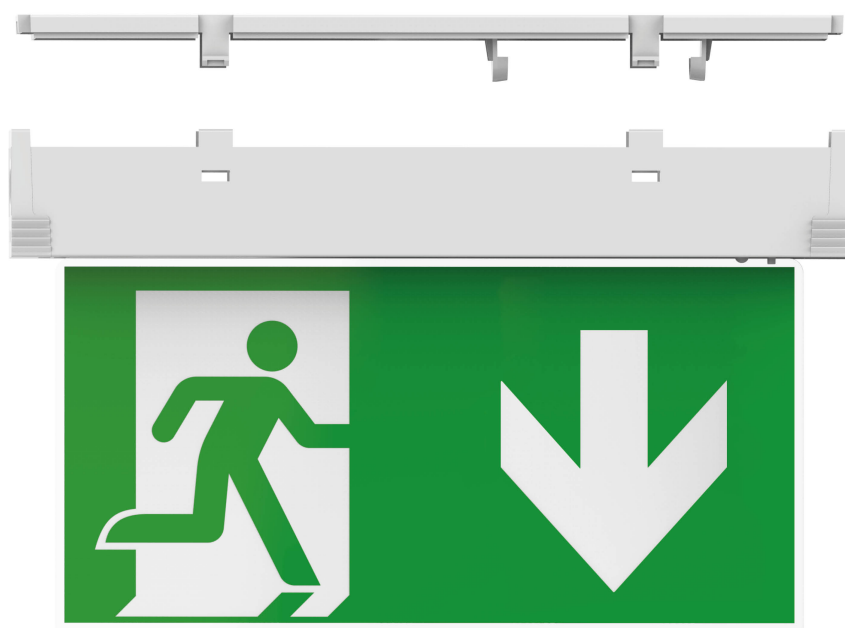

## Doxa

### **Doxa Self-Test Exit sign with multiple mounting positions, down legend**

The Kosnic Doxa LED emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency exit sign solution. The fitting is adaptable to be surface mounted in multiple positions, suspended or recessed mounted when used with the additional suspension kit or recessed kit. It is supplied with the upward arrow exit sign.

**DOX0103DW/ST ()**

## Specification

|                                     |                                          |
|-------------------------------------|------------------------------------------|
| Voltage                             | 220-240 Vac 50-60 Hz                     |
| Current (mA)                        | 30                                       |
| Rated Power (W)                     | 3                                        |
| CCT Words                           | Day Light                                |
| CCT (K)                             | 6500                                     |
| Total Luminous Flux (lm)            | 50 (maintained mode) 30 (emergency mode) |
| Nominal Lifetime (h)                | 40000                                    |
| Power Factor                        | 0.43                                     |
| Ambient Temperature Range (°C)      | 0 to 40                                  |
| Weight (kg)                         | 367                                      |
| In-rush current (peak/duration) (A) | 12.8/116                                 |
| Protection Rating                   | Class II                                 |
| IP Rating                           | IP20                                     |
| Battery Capacity                    | 2600 mAh                                 |
| Battery Charging Time               | 12 hours                                 |
| Battery Code                        | KBAT2600LI1                              |
| Battery Life                        | 4 years                                  |
| Battery Type                        | Li-Ion                                   |
| Battery Voltage                     | 3.7 V                                    |
| Battery Warranty                    | 4 Years                                  |
| Emergency Operation Test            | Self-Test (ATS Type S)                   |
| Emergency Conversion Time           | 1 second                                 |
| Emergency Operating Time            | 3 hours                                  |

## Light Source Specification

|                                 |      |
|---------------------------------|------|
| Lumen Maintenance Factor (x.xx) | 0.75 |
|---------------------------------|------|

## Optional Gears and Accessories

|               |                                  |
|---------------|----------------------------------|
| Accessories 1 | Exit Sign Left/Right EESN02-PSLR |
|---------------|----------------------------------|

## Technical Drawings

