


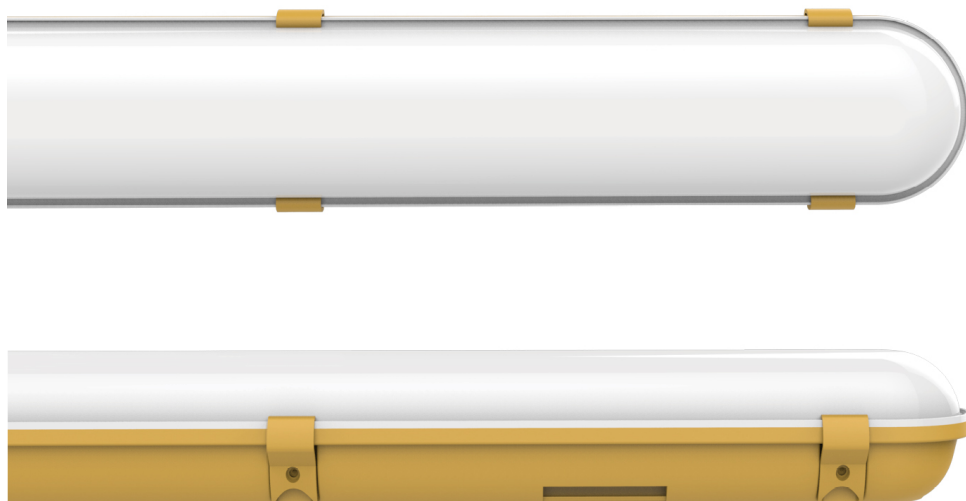

Trent OnSite

Trent OnSite 5ft 25W 110V non-corrosive linear luminaire for working site applications

The Kosnic Trent On-Site non-corrosive LED batten is for use on a 100-110V supply for worksite applications. The 4ft and 5ft versions are also available with a built-in emergency module. The two available stands include a 5 meter extension cable with a yellow CEE 3-pin plug and two 110V socket outlets.

KBTN25WL5F-W40 (05934)

Specification

Voltage	100-120Vac 50-60Hz
Current (mA)	239
Rated Power (W)	25
CCT Words	Cool White
CCT (K)	4000
Total Luminous Flux (lm)	2250
Nominal Lifetime (h)	40000
SDCM of CCT	<6
Flicker %	35
Power Factor	0.95
Ambient Temperature Range (°C)	-10 to 40
Weight (kg)	1.54
Protection Rating	Class I
IK Rating	IK08
IP Rating	IP65

Light Source Specification

Light Source Cap Type (or other interface)	Wiring Terminals
Dimmable (Y/N/Specific dimmer)	N
CRI	>80
Lumen Maintenance Factor (x.xx)	0.75

Optional Gears and Accessories

Accessories 1	KBTN-WL-STAND1 Metal Stand, 5m extension cable, yellow CCE 3-pin plug and two sockets outlets
Accessories 2	KBTN-WL-STAND2 Metal Stand, 5m extension cable, yellow CCE 3-pin plug and two sockets outlets for KBTN20WL2F-W43

Technical Drawings

