


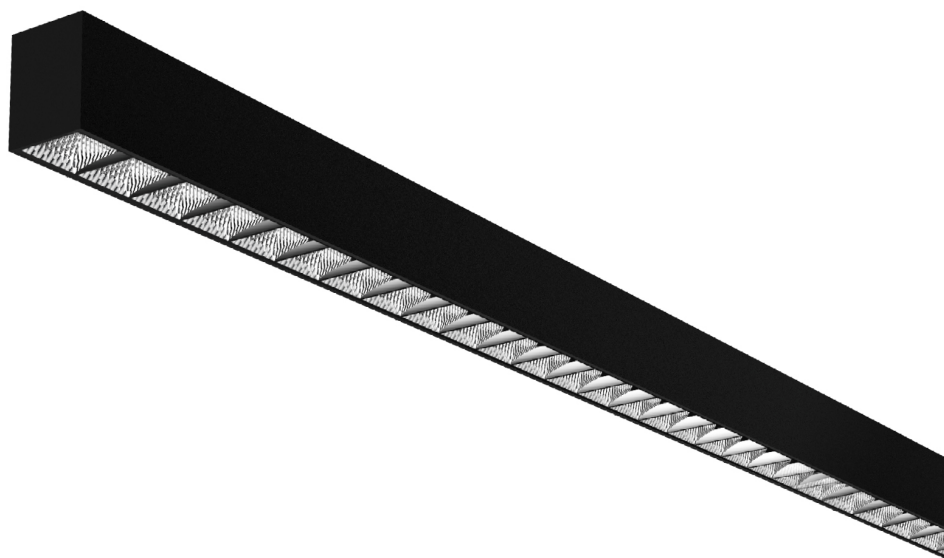

Nile II

Suspended batten, Built-in Backlight, 60W DALI Dim, 4000K, Asymmetric 55°x90°, Black

The Kosnic Nile suspended battens are an elegant design available in black or white with a variety of diffuser/beam options. The Microprism PS Diffuser 80° version can also cast 30% of the light up and 70% down, or all the light output downwards. The battens can be surface mounted or suspended as standard with Global/Unipro 3-circuit track and Interlock mounting accessories available as extras. Offering energy efficient lighting with a long operational life they are ideal for modern offices, classrooms, corridors and retail premises.

KBTN60LH/D-A40-BLK ()

Specification

Voltage	220-240Vac50/60Hz
Current (mA)	266
Rated Power (W)	60
CCT Words	CoolWhite
CCT (K)	4000
Total Luminous Flux (lm)	3100
Beam Angle(°)	MicroprismPSDiffuser-80°,Asymmetric-55° (Axial)x90°(Trans),Lens-85°
Nominal Lifetime (h)	40000
Flicker %	3
Power Factor	0.98
Ambient Temperature Range (°C)	-20to40
Weight (kg)	2.39kg-MicroprismPSDiffuser-80°,2.37kg- Asymmetric-55°(Axial)x90°(Trans),2.57kgLens-85°
In-rush current (peak/duration) (A)	151/2.28us
Protection Rating	ClassI
IP Rating	IP20

Light Source Specification

Light Source Cap Type (or other interface)	WiringTerminals
Dimmable (Y/N/Specific dimmer)	Y
CCT	4000k
CRI	>80
Lumen Maintenance Factor (x.xx)	0.8

Optional Gears and Accessories

Accessories 1	KPT-KBTN-TADA1-WHT/BLKTrackAdaptor3CoreFlex
Accessories 2	KPT-KBTN-TADA2-WHT/BLKTrackAdaptor5CoreFlex
Accessories 3	KPT-KBTN-CL-WHT/BLKInterlockLConnector
Accessories 4	KPT-KBTN-CT-WHT/BLKInterlockTConnector

Accessories 5	KPT-KBTN-CX-WHT/BLKInterlockXConnector
Accessories 6	KPT-KBTN-CIInterlockIConnector
Accessories 7	KPT-KBTN4F-W1WiringConnector-On/Off1.2m
Accessories 8	KPT-KBTN5F-W1WiringConnector-On/Off1.5m
Accessories 9	KPT-KBTN4F-W2WiringConnector-DALI1.2m
Accessories 10	KPT-KBTN5F-W2WiringConnector-DALI1.5m

Technical Drawings

