



## Faceta

### **Faceta Premium LED downlight with faceted reflector with switchable CCT & Wattage, 26W/22W, White**

The Kosnic Faceta LED Commercial Downlight range are retrofit LED lighting for widely used 4", 6" and 8" fluorescent downlights with a distinctive faceted reflector and a recessed light source. The LED Commercial Downlights are now available with a switchable wattage and CCT, so you can set one of two output powers and select from a range of colour temperatures. The range offers affordable products with high lumen efficiency and a long life. Furthermore, the downlights are compatible with Kosnic's emergency modules.

**KCDL2622FR65/SCT-WHT ()**




## Specification

|                                                             |                                 |
|-------------------------------------------------------------|---------------------------------|
| Voltage                                                     | 220-240Vac 50-60Hz              |
| Current (mA)                                                | 101, 119                        |
| Rated Power (W)                                             | 22, 26                          |
| CCT Words                                                   | Warm White/Cool White/Day Light |
| CCT (K)                                                     | 3000K/4000K/5000K               |
| Total Luminous Flux                                         | 1700, 1800, 2000, 2130          |
| Nominal Lifetime (h)                                        | 40000                           |
| SDCM (McAdam Ellipses) for CCT                              | 0.7, 3.5, 5.7                   |
| Power Factor                                                | 0.95                            |
| Switch Cycles                                               | 50000                           |
| Warm-up Time 60% $\Phi$ (X.X S)                             | 0.5                             |
| Warm-up Time 95% $\Phi$ (X.X S)                             | 0.6                             |
| 2) External LED control gear                                | No                              |
| 3) External T5 of 4-pin single cap fluorescent control gear | No                              |
| 4) Other external fluorescent control gear                  | No                              |
| 5) External HID control gear                                | No                              |
| 7) Lamps with anti-glare shield                             | No                              |
| Correction Factor                                           | 1                               |
| Lamp Cap                                                    | N/A                             |
| LM at 6000h                                                 | 0.85                            |
| LM at Nominal Lifetime                                      | 0.75                            |
| Mercury (X.X mg)                                            | 0                               |
| Prem Fail Rate at 1000h (%)                                 | 1                               |
| Start Time (X.X S)                                          | 0.3                             |


## Light Source Specification

|     |        |
|-----|--------|
| CRI | 82, 84 |
|-----|--------|


## Technical Drawings

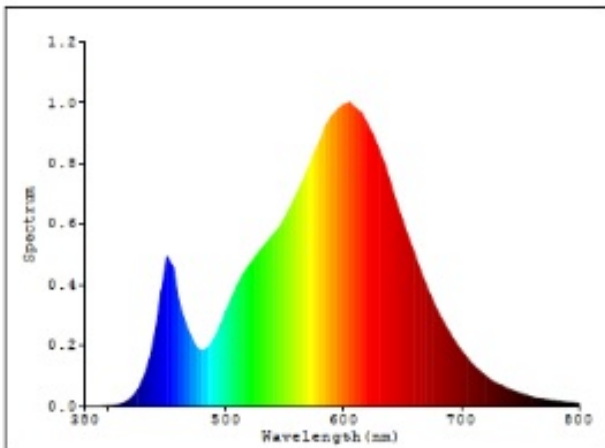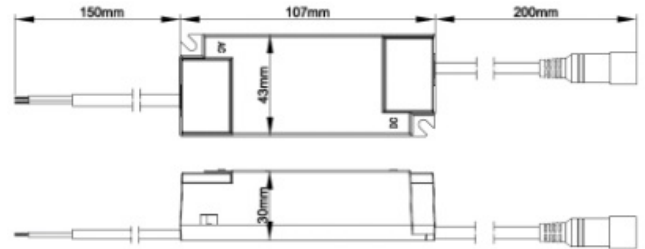

3000K

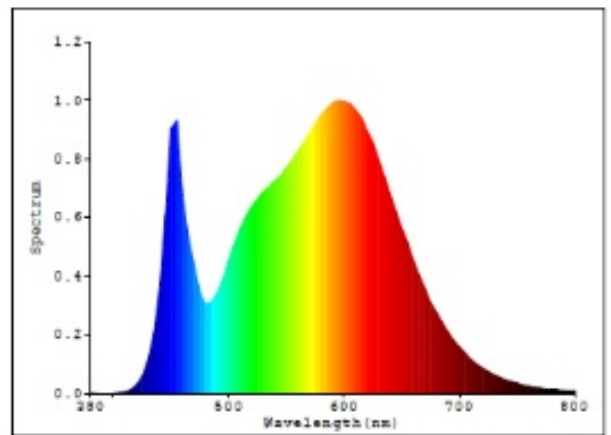

4000K

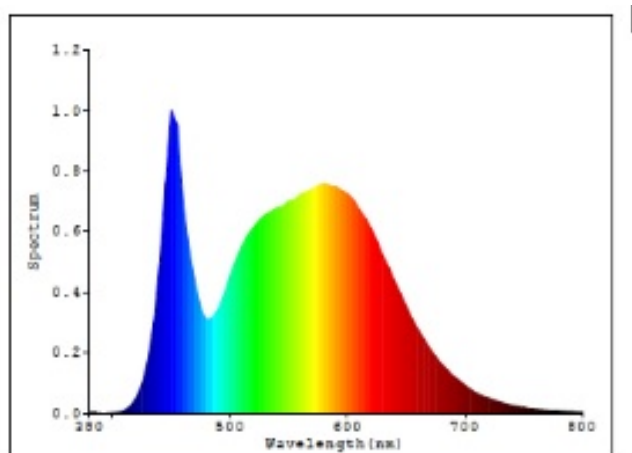

5000K