



Orda II

Orda II self-test twin-spot emergency 6W IP65, black

Available May 2023 Kosnic's Orda II LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as either standard or self-test versions. The Orda II LED Emergency Twin-Spot has two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Typical applications include warehouses, factories, industrial sites and long corridors.

ORD06-BLK/ST (07247)



Specification

Voltage	220-240 Vac 50-60 Hz
Current (mA)	65
Rated Power (W)	9
CCT Words	6500
Total Luminous Flux (lm)	550
Beam Angle(°)	110
Nominal Lifetime (h)	40000
Power Factor	0.6
Dimensions (L x W x D) (mm)	261 x 184 x 78 (wall mounting), 261 x 146 x 67 (Ceiling mounting)
Cut-Out (mm)	Surface. Side or rear 20mm knock-out
Ambient Temperature Range (°C)	0 to 40
Protection Rating	Class II
IP Rating	IP65
Battery Capacity	4000
Battery Charging Time	24 hours
Battery Code	BAT20LFP4
Battery Life	4 years
Battery Type	LiFePO4
Battery Voltage	6.4
Battery Warranty	4 Years
Emergency Operation Test	Self-Test (ATS Type S)
Emergency Conversion Time	1
Emergency Operating Time	3 hours



Light Source Specification

CRI	80
Lumen Maintenance Factor (x.xx)	0.75

Technical Drawings

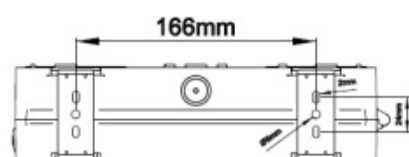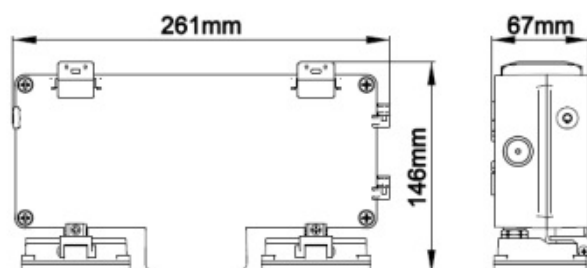

Ceiling Mounting

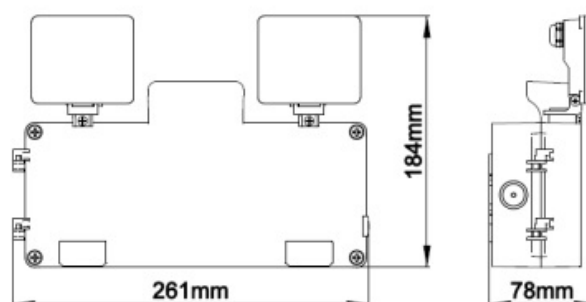

Wall Mounting