



## Orda II

### **Orda II twin-spot emergency 6W IP65, white**

Available May 2023 Kosnic's Orda II LED Emergency Twin-Spot is a self-contained, high-power, robust, non-maintained emergency lighting solution available as either standard or self-test versions. The Orda II LED Emergency Twin-Spot has two adjustable directional spotlights providing emergency illumination along exit routes for three hours during a power cut. Typical applications include warehouses, factories, industrial sites and long corridors.

**ORD06-WHT** (07248)


## Specification

|                                |                                                                   |
|--------------------------------|-------------------------------------------------------------------|
| Voltage                        | 220-240 Vac 50-60 Hz                                              |
| Current (mA)                   | 65                                                                |
| Rated Power (W)                | 9                                                                 |
| CCT Words                      | 6500                                                              |
| Total Luminous Flux (lm)       | 650                                                               |
| Beam Angle(°)                  | 110                                                               |
| Nominal Lifetime (h)           | 40000                                                             |
| Power Factor                   | 0.6                                                               |
| Dimensions (L x W x D) (mm)    | 261 x 184 x 78 (wall mounting), 261 x 146 x 67 (Ceiling mounting) |
| Cut-Out (mm)                   | Surface. Side or rear 20mm knock-out                              |
| Ambient Temperature Range (°C) | 0 to 40                                                           |
| Protection Rating              | Class II                                                          |
| IP Rating                      | IP65                                                              |
| Battery Capacity               | 4000                                                              |
| Battery Charging Time          | 24 hours                                                          |
| Battery Code                   | BAT20LFP4                                                         |
| Battery Life                   | 4 years                                                           |
| Battery Type                   | LiFePO4                                                           |
| Battery Voltage                | 6.4                                                               |
| Battery Warranty               | 4 Years                                                           |
| Emergency Operation Test       | Manual                                                            |
| Emergency Conversion Time      | 1                                                                 |
| Emergency Operating Time       | 3 hours                                                           |


## Light Source Specification

|                                 |      |
|---------------------------------|------|
| CRI                             | 80   |
| Lumen Maintenance Factor (x.xx) | 0.75 |

## Technical Drawings

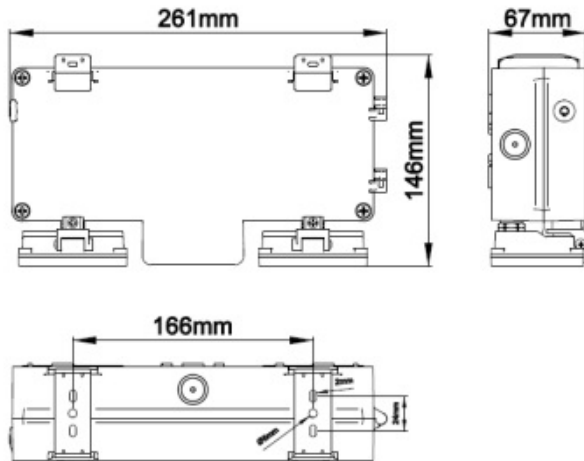

**Ceiling Mounting**

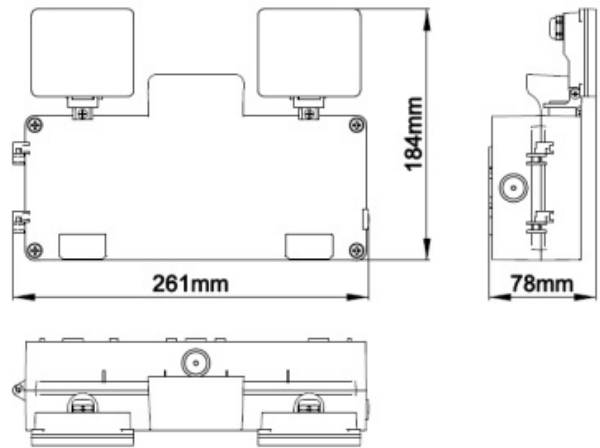

**Wall Mounting**