



Faceta

Faceta Premium LED downlight with faceted reflector with switchable CCT & Wattage, 20W/16W, White

The Kosnic Faceta LED Commercial Downlight range are retrofit LED lighting for widely used 4", 6" and 8" fluorescent downlights with a distinctive faceted reflector and a recessed light source. The LED Commercial Downlights are now available with a switchable wattage and CCT, so you can set one of two output powers and select from a range of colour temperatures. The range offers affordable products with high lumen efficiency and a long life. Furthermore, the downlights are compatible with Kosnic's emergency modules.

KCDL2016FR65/SCT-WHT ()




Specification

Voltage	220-240Vac 50-60Hz
Current (mA)	73, 99
Rated Power (W)	16, 20
CCT Words	Warm White/Cool White/Day Light
CCT (K)	3000K/4000K/5000K
Total Luminous Flux	1000, 1100, 1250, 1380
Nominal Lifetime (h)	40000
SDCM (McAdam Ellipses) for CCT	0.7, 3.5, 5.7
Power Factor	0.85, 0.88
Switch Cycles	50000
Warm-up Time 60% Φ (X.X S)	0.5
Warm-up Time 95% Φ (X.X S)	0.6
2) External LED control gear	No
3) External T5 of 4-pin single cap fluorescent control gear	No
4) Other external fluorescent control gear	No
5) External HID control gear	No
7) Lamps with anti-glare shield	No
Correction Factor	1
Lamp Cap	N/A
LM at 6000h	0.85
LM at Nominal Lifetime	0.75
Mercury (X.X mg)	0
Prem Fail Rate at 1000h (%)	1
Start Time (X.X S)	0.3


Light Source Specification

CRI	82, 84
-----	--------


Technical Drawings

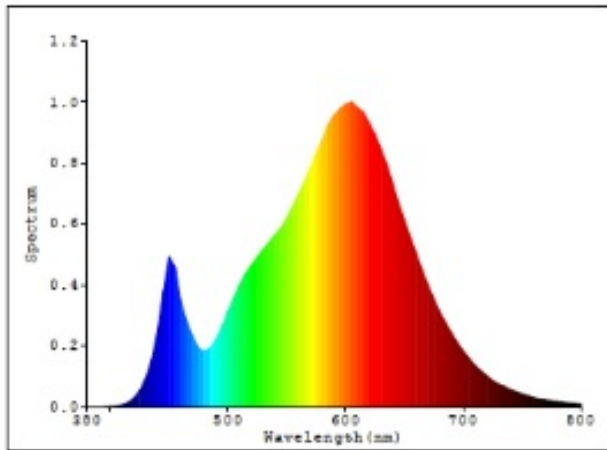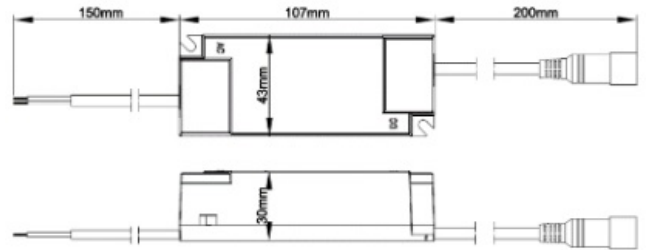

3000K

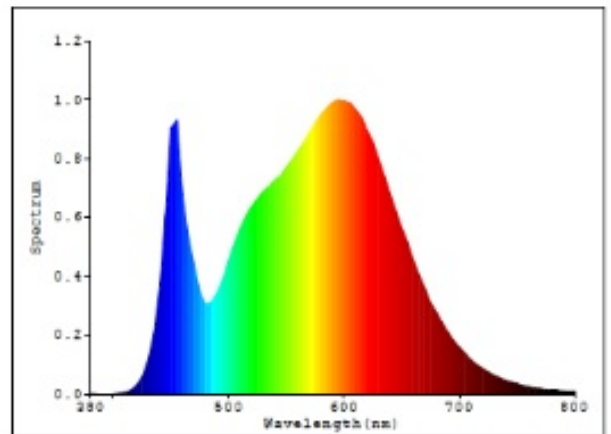

4000K

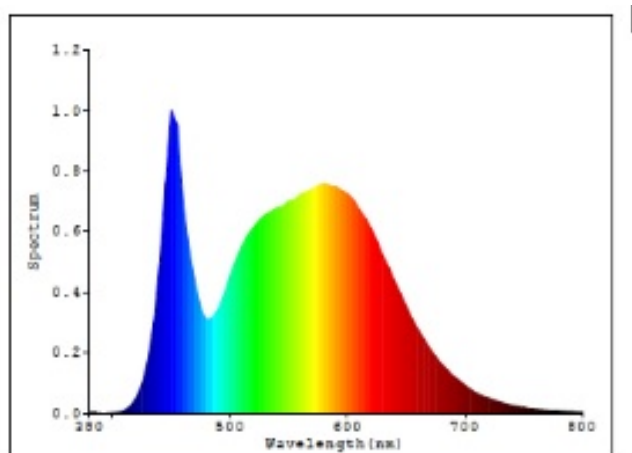

5000K